


# Nest US3

1219 x 1016

CPP 130

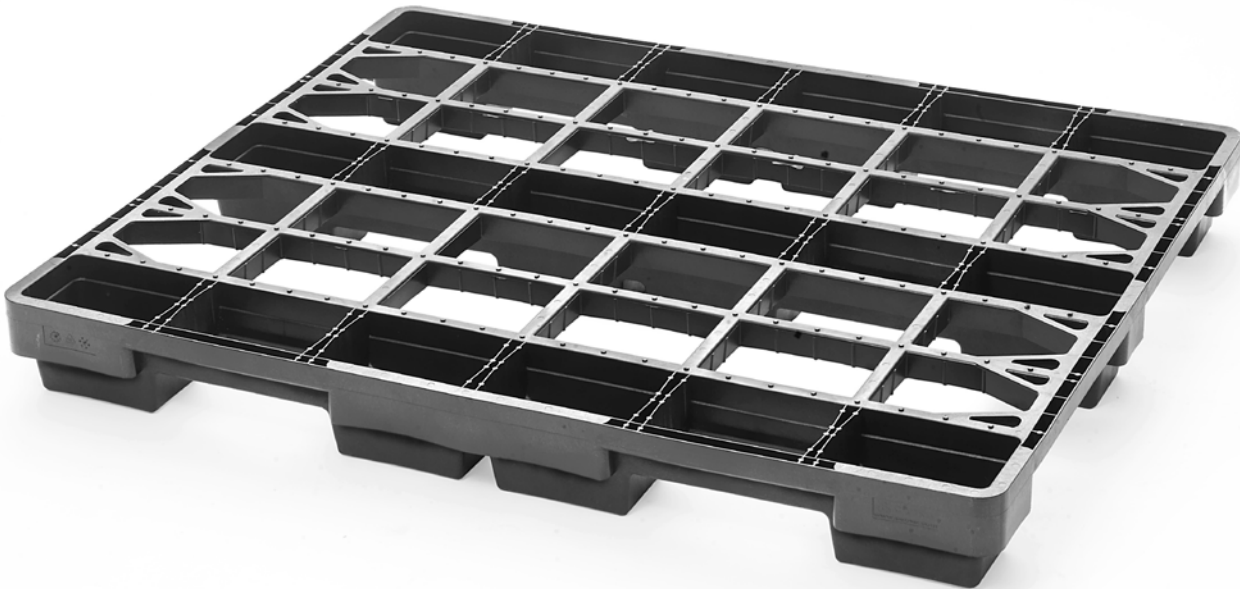

### Nestable, light-weight plastic pallet for conveyor technique


The Nest US3's 12 oversized feet ensure a smooth run on roller or chain conveyors, but still allow space savings when the empty pallets are nested. A considerable cost advantage on return transport.

#### Bottom support



> 12 feet (12F)

#### Deck options



> open deck (OD)



12 oversized feet ensure the smooth running on roller and chain conveyors.






Nestable plastic pallets require less floor space when transported or stored in a warehouse.

## Technical data\*1

	Previous name	Bottom support	Top deck	Dimensions [mm]	Load capacities*2 [kg]			Weight [kg]	
					Static	Dynamic	Racking	HDPE	PO
Nest US3 (OD-12F)	CPP 130	12 feet, nestable	open	1219 x 1016 x 130	2800	1200	—	8,0	9,0

Entry: 4 ways | Nesting height: 70 mm | Safety rim: -

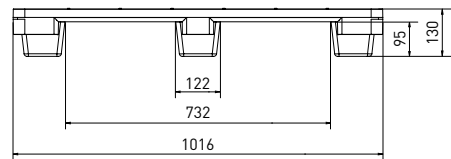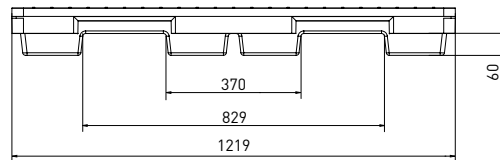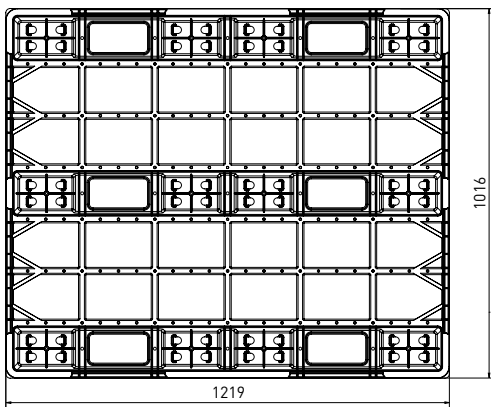

nominal sizes in mm

## Options

- Color:  (other colors on request\*3)  Individual marking\*3
- Anti-slip: anti-slip knobs on deck
- ESD prevention: -



\*1 Figures can vary depending on the raw material used and options applied. \*2 Guideline values are based both on experience and parts of test ISO 8611, which tests with evenly distributed loads at room temperature (20°C). Varying data may result from different conditions of usage. Your specific requirements can be identified upon request. \*3 Minimum quantity required - PO pallets should only be used and stored in a dry environment. We reserve the right to change any of the stated information without prior notice.