


Shuttle E7

1200 x 800

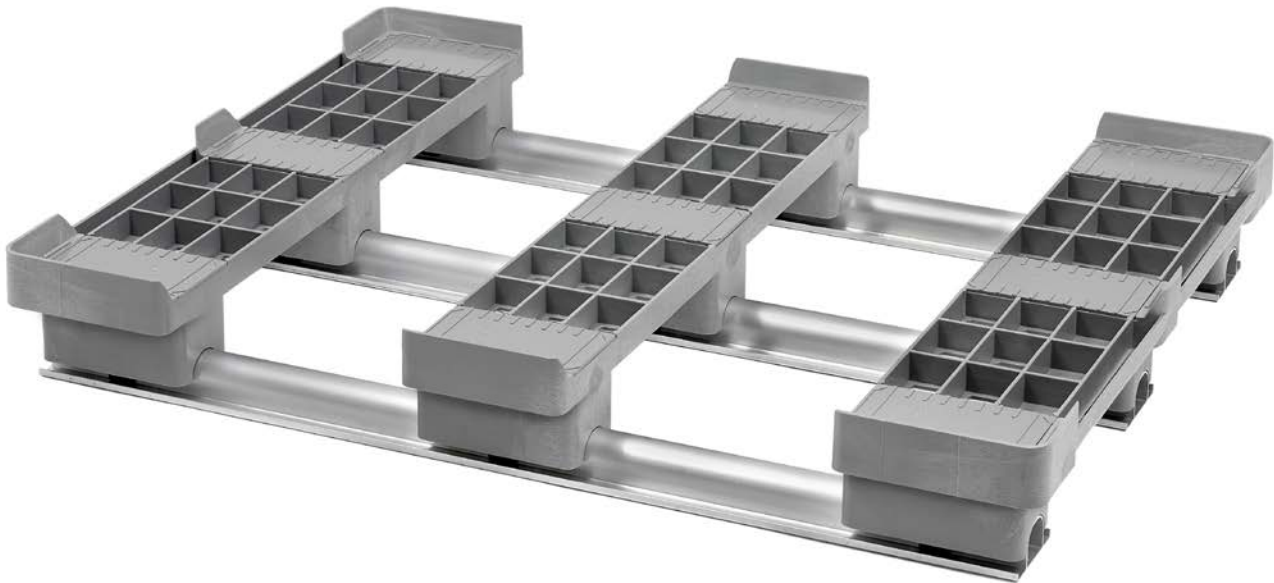

The intelligent transport solution for conveying and storing pallets in high racks

Signs of heavy use and damage to Euro wooden pallets from the pool of exchangeable pallets can cause malfunctions in sensitive intralogistics systems. The Shuttle E7 was developed to allow these pallets to be safely processed and stored in spite of this. It accepts pallets of different quality, size and type using a „piggyback system“ and transports them safely through the automated conveying systems.

Bottom support




> 3 runners (3R)

Deck options



> open deck (OD)

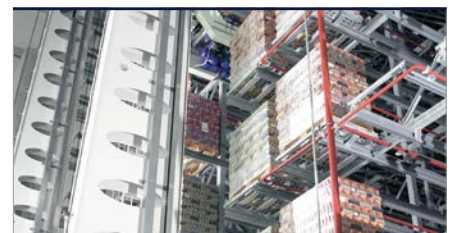

By the use of the Shuttle E7 not only heavy and rackable pallets ...



... but also lightweight and nestable plastic pallets can be transported and stored.




The light weight plastic chassis rests in three bend-proof aluminum beams.

Technical data*1

	Bottom support	Top deck	Dimensions [mm]	Load capacities*2 [kg]			Weight [kg]		Pallets per	
				Static	Dynamic	Racking	HDPE	PO	Stack	Truck
Shuttle E7 (OD-3R)	3 runners	open	1200 x 800 x 140	10000	2000	1250	15,0	–	16	416

Entry: 2 ways | Nesting height: – | Safety rim: 30 mm

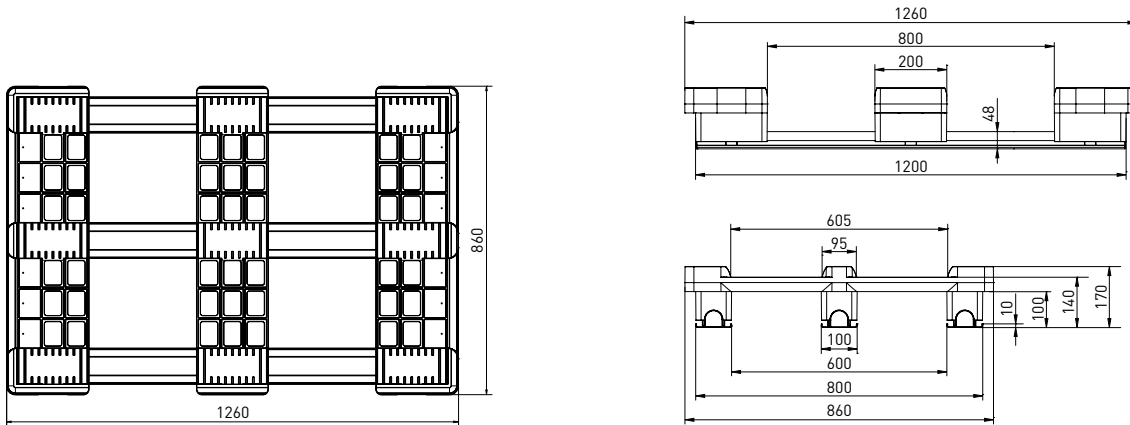

nominal sizes in mm

Options

- Color: [other colors on request*3] > Individual marking*3
- Anti-slip: safety rim (standard)
- ESD prevention: –



*1 Figures can vary depending on the raw material used and options applied. *2 Guideline values are based both on experience and parts of test ISO 8611, which tests with evenly distributed loads at room temperature (20°C). Varying data may result from different conditions of usage. Your specific requirements can be identified upon request. *3 Minimum quantity required - PO pallets should only be used and stored in a dry environment. We reserve the right to change any of the stated information without prior notice.